



-20°C ÷ 90°C



From 0 to 16 Bar



Water



Taper BSPT ISO 7 1/4"



Body & handle: POM/Acetal
O'Rings: NBR

ADVANTAGES

Low pressure drop, easy and quick to install, environment friendly and non-toxic. WRAS approved (cold water use only).



REACH

Products in compliance with the directive 2002/95/EC


RoHS2

Products in compliance with the directive 2011/65/EU

WRAS
Water Regulations Advisory Scheme

Two way valve M/F BSPT with lever

9020

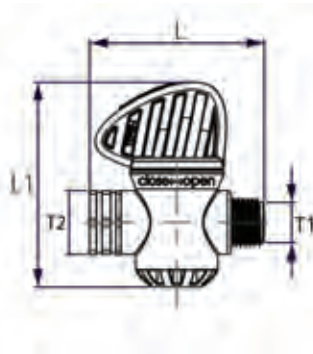

CODE	T1	T2	L	L1	GR.
9020TR14	R1/4"	R1/4"	51,2	57,6	70



The arrow on the handle indicates the direction of the flow.

